

CALORPLAST Gas / Liquid Polymer Heat Exchanger


- where outstanding corrosion resistance matters
- where sustainability matters
- where energy efficiency matters



www.calorplast.de


 **CALORPLAST**
Wärmetechnik

APPLICATIONS

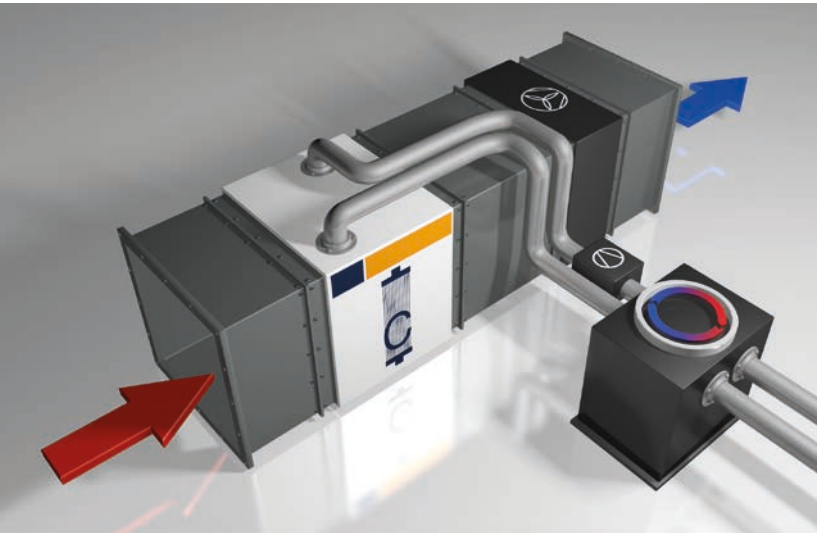

Gas cooling/heating/ condensing

- Cooling, heating or drying of corrosive gas flows
- Condensing and recovery of corrosive or toxic gas components
- Energy recovery with heat pumps
- Air cooling/heating of corrosive liquids with waste gas/air

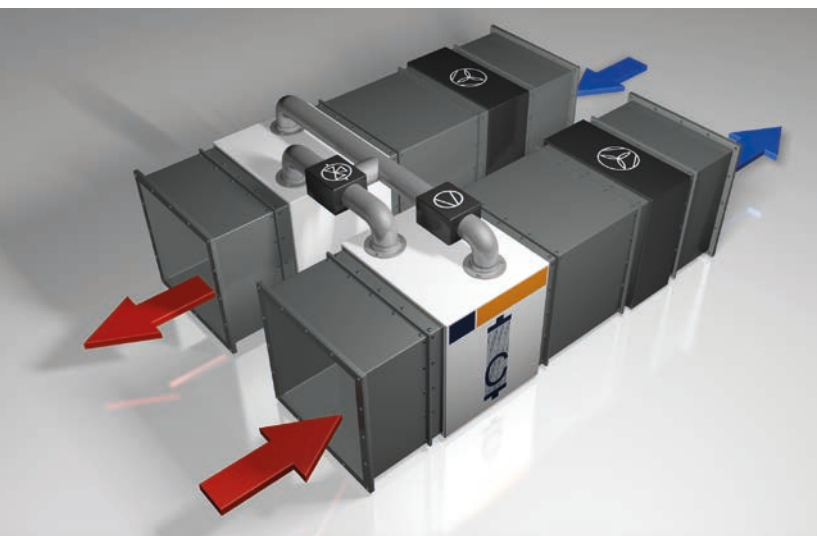


Energy Recovery

- Energy recovery in industrial HVAC systems
- Ventilation and heating of factory workshops
- Central laboratory ventilation
- Ventilation in agriculture

Technical Data

■ Materials:	PE-RT, PP or PVDF (Housing in PPs or PE)
■ Operation temperatures:	-30 to +140 °C (depending on the material chosen)
■ Operation pressure:	3 to 16 bar (depending on the material chosen and the operation temperature)
■ Pressure drop:	50 mbar (approx.)

BENEFITS

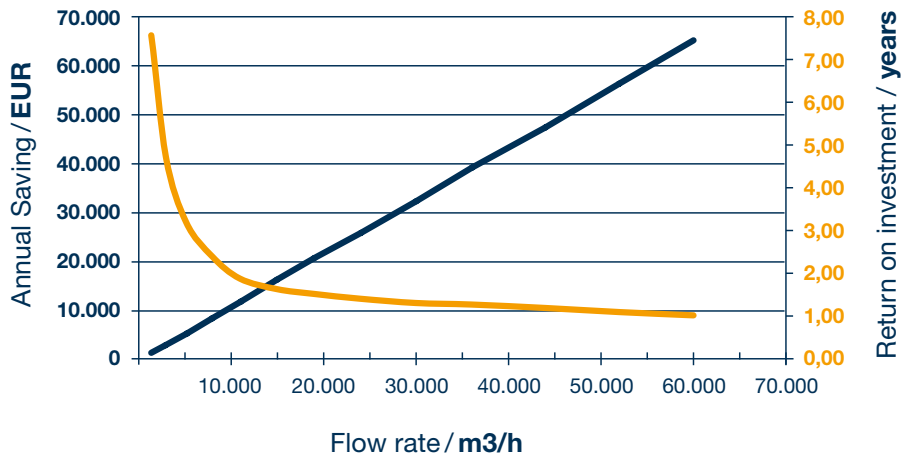


- Fully corrosion resistant & hygienic
- High efficiency
- Quick return on investment
- 10-20 years lifetime
- 30 years of experience





CALORPLAST WÄRMETECHNIK GmbH

■ Siempelkampstraße 94 ■ 47803 Krefeld ■ Germany
■ Phone: +49 (0)2151-8777-0 ■ Fax: +49 (0)2151-8777-33 ■ E-mail: info@calorplast.de

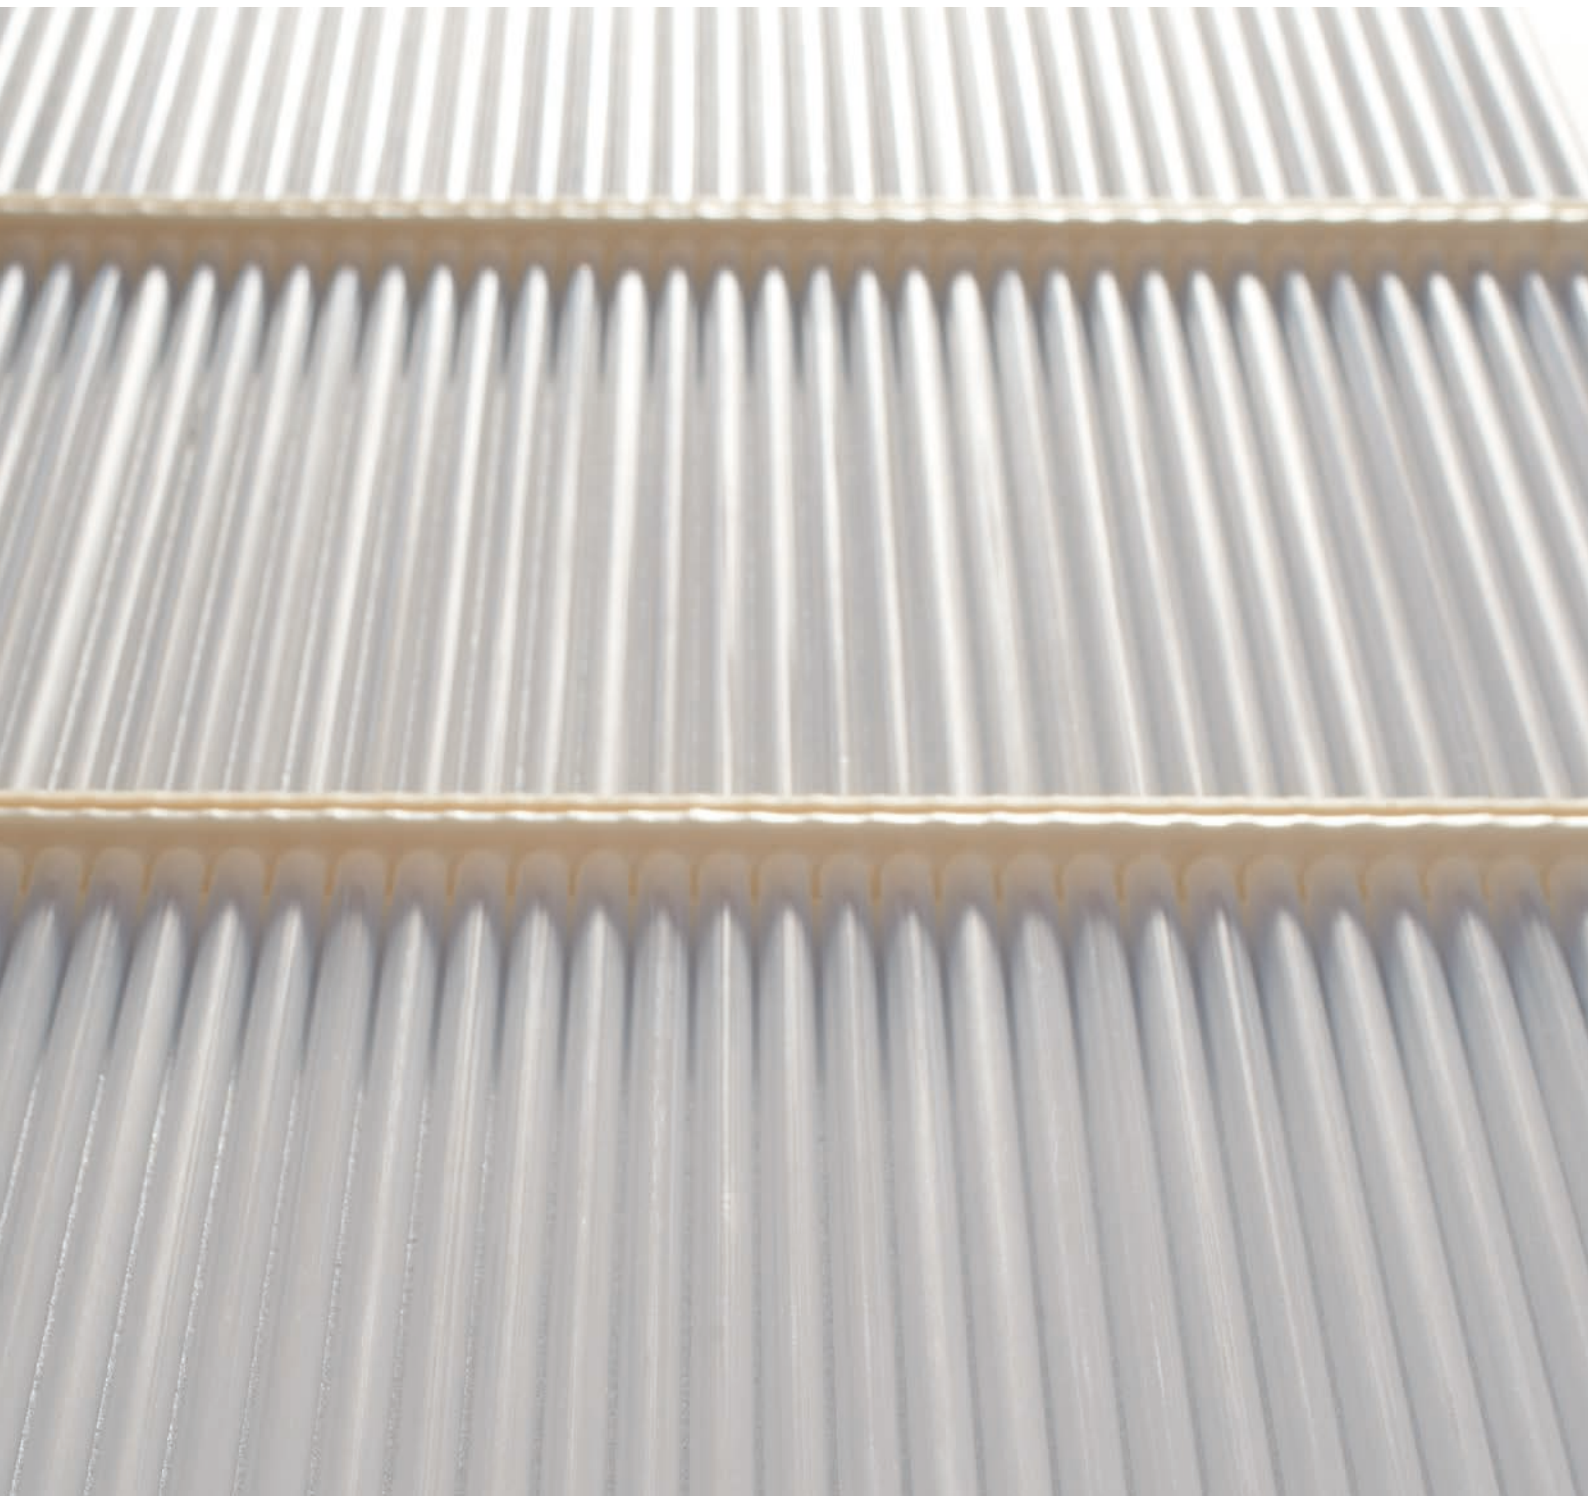

www.calorplast.de

 **CALORPLAST**
Wärmetechnik